



The ultimate outdoor grilling experience.

Phone: 1 (888) 287-3333 ♦ Fax: 1 (877) 855-5373 ♦ #106-2480 Mt. Lehman Road, Abbotsford, BC V4X 2N3

Installation Manual

Rail Mount with Versa Grill Adapter

This mounting kit can be used with your Jackson Grill. It fits the following products:

- Versa 75
- Versa 100

While this grill mount is a very strong and durable mount, it is not recommended to leave the grill attached to the mount if the rail system you are mounting to is moving.

Package Contents:

The following parts are included in this package:

- 1 x Rail Mount
- 1 x Adapter Plate includes 4 stainless steel screws & washers
- 4 x Nyloc Nuts and Bolts
- 1 x Installation Manual

Installation Procedure:

1. Attaching the H Bracket
 - a. With the four Nyloc nuts and bolts provided, attach the H Bracket to the supplied adapter plate (see Figure 1 for reference).
2. Attaching the Adapter Plate
 - a. With the S/S screws & washers provided, fasten the adapter plate (with the H bracket) to the grill by lining up the installation holes on the plate (four out of the six) with the four existing threaded holes in the grill's base (see Figure 2 for reference).

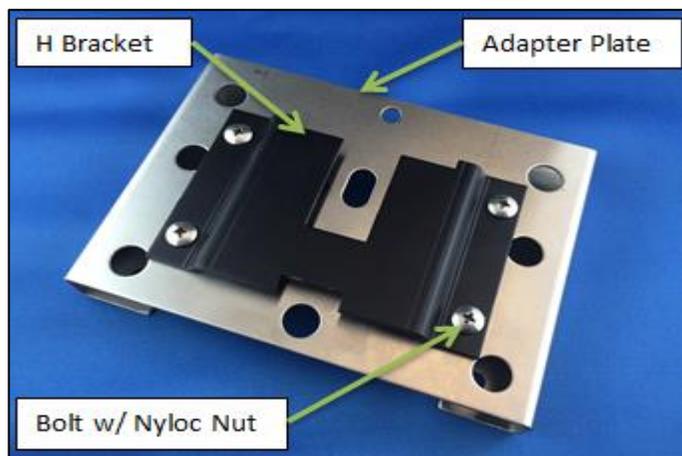


Figure 1: H Bracket mounted to Adapter Plate

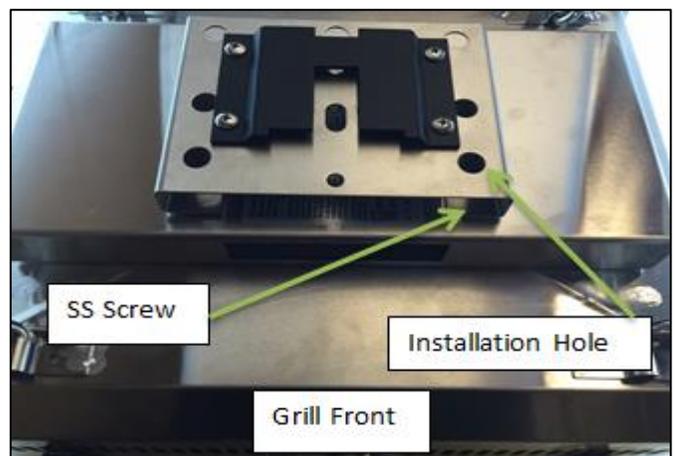


Figure 2: Adapter Plate mounted to underside of Grill



The ultimate outdoor grilling experience.

Phone: 1 (888) 287-3333 ♦ Fax: 1 (877) 855-5373 ♦ #106-2480 Mt. Lehman Road, Abbotsford, BC V4X 2N3

3. Positioning the Mount

- This mount can be used with horizontal rail, vertical rail or on some angled rail. It can be used with square rail or round rail up to about 1-1/8 inch diameter.
- Attach the clamps to the rail as shown in Figure 3. Tighten bolts evenly on all corners to ensure a tight fit. Attach the mount so the “tongue” of the L bracket is pointing outboard from the rail so the mount is not in the way when there is no grill attached and that the grill is held over the side when it is mounted.

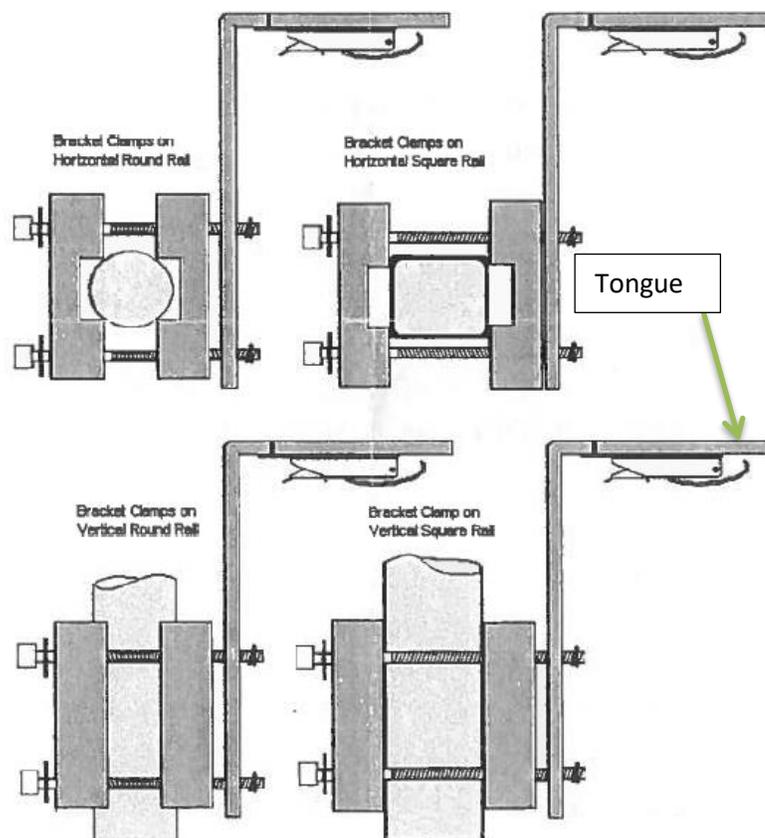


Figure 3: Rail Mount (Horizontal and Vertical Mount)

Tips for Using the Mount:

Before mounting the grill, release the stainless steel clasp so it is hanging loose. Most of the mount has been assembled for you. When the H bracket is on the grill and the mount bracket is on the rail, hold the grill securely and slide the grill on to the mount. The “tongue” of the L shaped bracket will slide into the space between the H bracket and the grill base tray. Once the grill is firmly slid on to the tongue of the mount, tighten the latch/clasp so that the leading hook of the clasp grips the H bracket on the grill. This clasp will be stiff when new but you will be able to attach and remove your grill as often as you want with your new mount kit. The clasp will become easier to open and close with use but will always firmly hold your grill in place.

****Caution: Do not place grill on latch bracket until all mounting nuts are tight.**